




MB-S14 S3



“Handy with high performance”

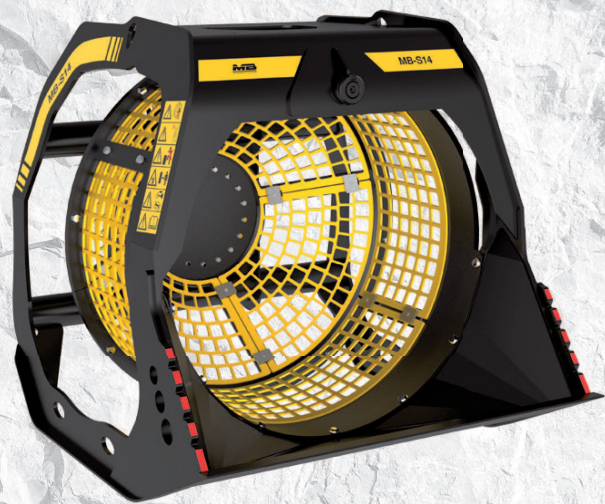

Suitable for excavators between 9 to 20 Ton, specially designed for medium sized environments where applications require high level performance.

Ideal for use before or after crushing, the MB-S14 S3 screening bucket will reduce crushing time up to 60%. It also allows the screening of natural material (quarry residues, dry soil, and river stone) of any kind, making it convenient for on-site processing.

A must in reducing volumes and optimizing the size of materials for specific uses

The screening buckets MB are equipped with baskets formed by interchangeable modular panels, available with holes of different sizes based on requirements.

PRIMARY SELECTION:

WASTE MATERIAL
DEMOLITION MATERIAL
EXCAVATION FILLING MATERIAL
PEBBLES IN STREAMS
DEBRIS IN BEACHES
NATURAL STONES CLEANING

SPECIFICATIONS

RECOMMENDED EXCAVATOR	LOAD CAPACITY	BASKET DEPTH	GRID DIAMETER	DIMENSIONS
≥ 9 < 20 Ton	1,10 m ³	890 mm	1200 mm	1730 x 1400 H 1430 mm
OIL FLOW	PRESSURE	COUNTER PRESSURE DRAIN	WEIGHT	SPEED/MIN.
60 l/min.	150 bar	-	1,10 Ton	25/35 min/max

ACCESSORIES

RECOMMENDED SPARE PARTS KIT	FIXED COUPLER	QUICK FEMALE COUPLER	HOUR METER	
MBS120002	FC6010000 - FC7020000	BF6010000 - BF7020000	804MBBV01	
				24 MONTHS WARRANTY
				WA241400