

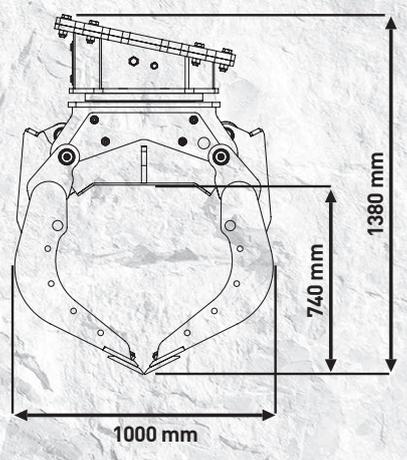


MB-G600

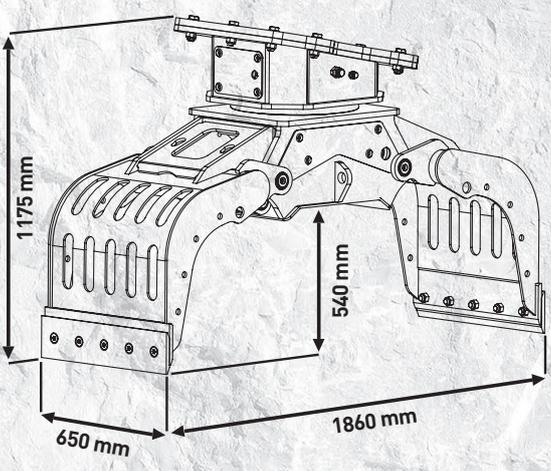

“Small and **efficient**”

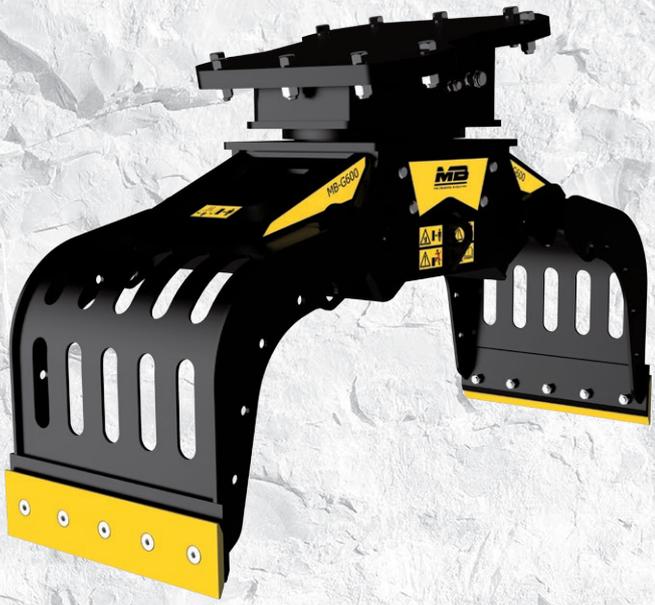

Designed for selecting and handling demolition materials and conceived according to the highest technological standards for any types of materials in a reliable way, with constance and total safety.

Thanks to the interchangeable claws and the 360° hydraulic rotation it allows you to handle large loads and odd forms.



SPECIFICATIONS

RECOMMENDED EXCAVATOR	LOAD CAPACITY (CLAWS CLOSED)	FLOW DIRECTION	OIL FLOW (OPEN/CLOSE)
≥ 6 ≤ 12 Ton	0,29 m ³ / 290 L	5 ÷ 15 l/min.	25 l/min.
PRESSURE OF ROTATION	PRESSURE (OPEN/CLOSE)	WEIGHT	ROTATION
160 bar	200 ÷ 400 bar	0,60 Ton	360°

ACCESSORIES

RECOMMENDED SPARE PARTS KIT	FIXED COUPLER	QUICK FEMALE COUPLER
MBG500008	FCG690000	MBG690000
24 MONTHS WARRANTY		
WA240600		