

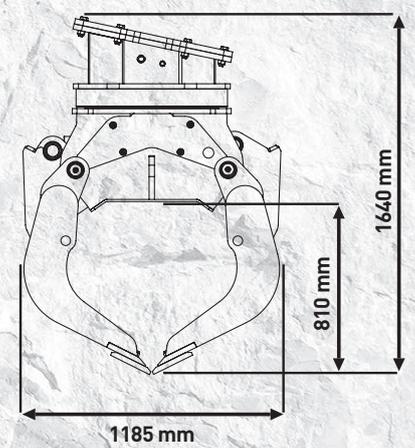


# MB-G1200

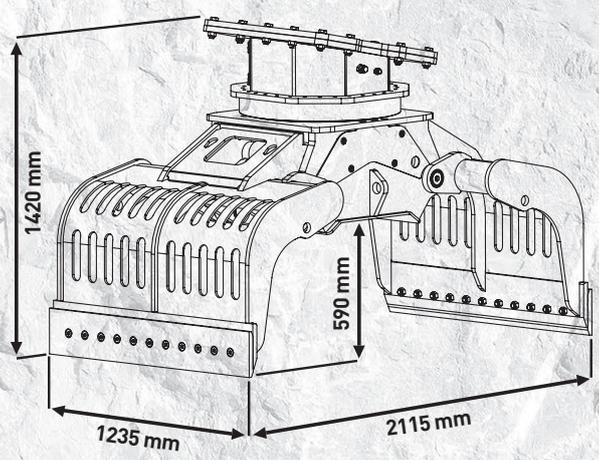

# “Great performance”

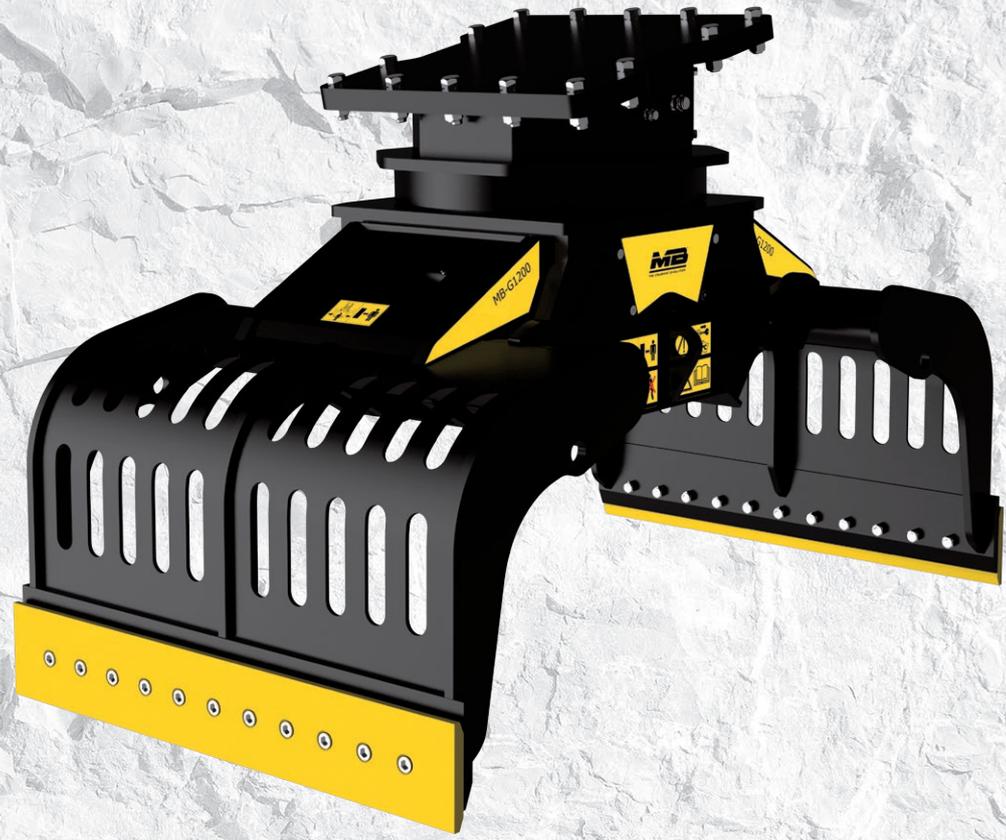

Designed for selecting and handling demolition materials and conceived according to the highest technological standards for any types of materials in a reliable way, with constance and total safety.

Thanks to the interchangeable claws and the 360° hydraulic rotation it allows you to handle large loads and odd forms.

## SPECIFICATIONS

RECOMMENDED EXCAVATOR	LOAD CAPACITY (CLAWS CLOSED)	FLOW DIRECTION	OIL FLOW (OPEN/CLOSE)
≥ 18 ≤ 25 Ton	0,71 m <sup>3</sup> / 710 L	20 ÷ 35 l/min.	50 l/min.
PRESSURE OF ROTATION	PRESSURE (OPEN/CLOSE)	WEIGHT	ROTATION
200 bar	300 ÷ 400 bar	1,6 Ton	360°

## ACCESSORIES

RECOMMENDED SPARE PARTS KIT	FIXED COUPLER	QUICK FEMALE COUPLER
MBG120008	FCG121500	MBG121500
<b>24 MONTHS WARRANTY</b>		
<b>WA241200</b>		