



# MB-G900 S4

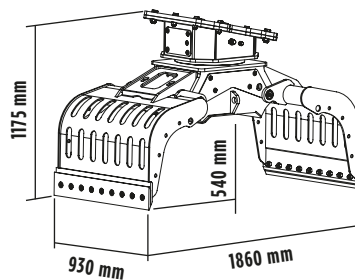

## ACCESSORIES

- RECOMMENDED SPARE PARTS KIT
- FIXED COUPLING
- GRIP IMPROVEMENT KIT
- MULTI-PURPOSE BLADE KIT
- RUBBER PROTECTION KIT
- CLAM SHELL KIT
- 24 MONTHS WARRANTY

## SPECIFICATIONS

RECOMMENDED EXCAVATOR	≥ 12 ≤ 18 ton
WEIGHT	0,78 ton
CAPACITY (CLAWS CLOSED)	0,43 m <sup>3</sup>
ROTATION	360° Gradi
OIL PRESSURE (ROTATION)	> 160 bar
OIL FLOW RATE (ROTATION)	15 ÷ 30 l/min.
OIL PRESSURE (OPENING/CLOSING)	200 ÷ 300 bar
OIL FLOW RATE (OPENING/CLOSING)	30 l/min.

## APPLICATION AREAS



URBAN  
CONSTRUCTION  
SITES



PORTS AND  
FREIGHT  
TERMINALS



QUARRIES



RECYCLING AND  
WASTE SORTING  
FACILITY



MOVING AND  
SEPARATING  
MATERIALS



UTILITY  
WORK



LANDSCAPING

The data provided above is not binding, as the manufacturer reserves the right to make improvements to its products at any time and without notice.

Rev. 2022/11



MBCRUSHER.COM