



# BF 60.1

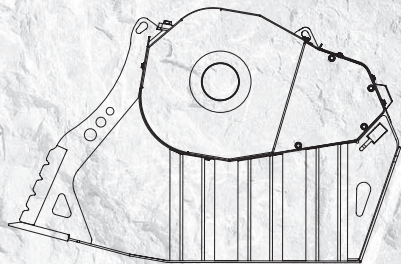

1790 mm



1160 mm

1000 mm

## “Small but for **great needs**”



Urban construction sites and limited work spaces are the ideal application for the BF 60.1 crusher bucket, regardless of the crushing job.

Suitable for excavators starting from 8 Ton, the BF 60.1 weights approximately 1,50 Ton and has a capacity of approx. 0,55 m<sup>3</sup>.

The mouth opening measures to 610x510 mm to ensure an optimal production rate of 19,80 m<sup>3</sup>/h.

### AREAS OF APPLICATION

DEMOLITION  
RECYCLING  
EXCAVATION  
ROAD WORKS

### SPECIFICATIONS

RECOMMENDED EXCAVATOR	LOAD CAPACITY	OPENING DIMENSIONS	OUTPUT SETTING	DIMENSIONS
≥ 8 Ton	0,55 m <sup>3</sup>	L 610 H 510 mm	≥ 15 ≤ 110 mm	1790 x 1000 H 1160 mm
OIL FLOW	PRESSURE	COUNTER PRESSURE	WEIGHT	MAXIMUM PRODUCTION
98 l/min.	215 bar	10 bar	1,50 Ton	19,80 m <sup>3</sup> /h

### ACCESSORIES

RECOMMENDED SPARE PARTS KIT	FIX COUPLER	QUICK FEMALE COUPLER	IRON SEPARATOR	HOURLY METER
BF6010028	FC6010000	BF6010000	BF6010010	804MBNF01
DUST SUPPRESSION KIT				24 MONTHS WARRANTY
KNMB00L-KNMB00S-KNMB00M				WA246010