



MB-R900




27 in




45 in

ACCESSORIES



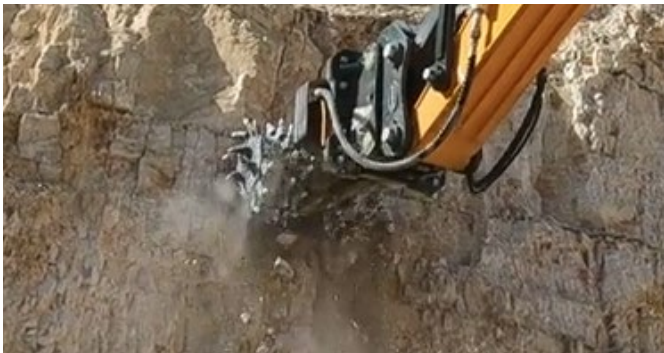





- RECOMMENDED SPARE PARTS KIT
 - FIXED COUPLING
 - LOW SET DRUM KIT
 - FULL SET DRUM KIT
 - DUST SUPPRESSION KIT
 - HIGH OIL TEMPERATURE REDUCING DEVICE
 - ROCK AND ASPHALT PICK KITS
 - WARRANTY EXTENSION
- GOLD 24



SPECIFICATIONS

EQUIPMENT	 ≥ 41,900 ≤ 77,200 lbs
RECOMMENDED OIL FLOW (MIN)	66 - 92 gal/min
PRESSURE	> 5,076 PSI
COUNTER PRESSURE	< 58 PSI
OUTPUT TORQUE	13,200 Nm
PICK FORCE	29,502 ft lb
WEIGHT	3,086 lbs
SPEED/MIN. (MIN/MAX)	60 RPM/80 RPM

AREAS OF APPLICATION

							
TUNNELS	UTILITY WORK	URBAN JOB SITES	ROAD WORK	STONE AND CONCRETE WALL PROFILING	DEMOLITION	EXCAVATION AND FOUNDATION WORK	AGRICULTURAL AND FOREST AREAS

The data provided above is not binding, as the manufacturer reserves itself the right to make improvements to its products at any time and with no advance notice. References to excavator weights are approximate and many may be subject to changes.