



MB-G600 S2

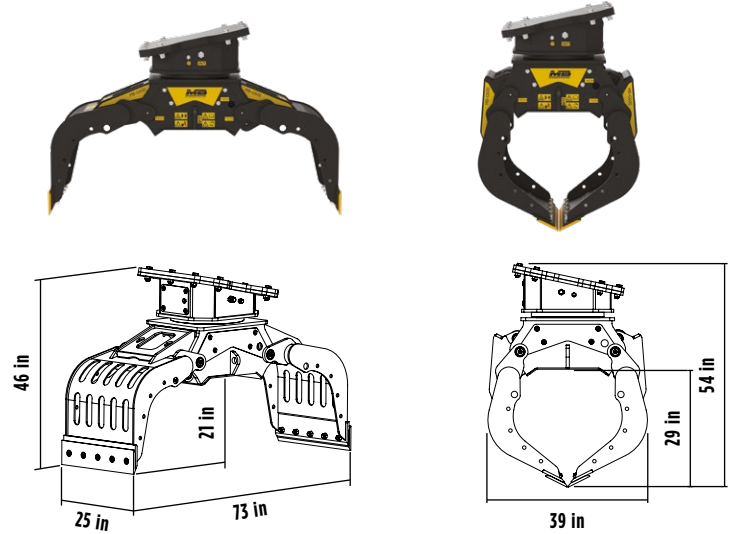

ACCESSORIES

- RECOMMENDED SPARE PARTS KIT
- FIXED COUPLING
- GRIP IMPROVEMENT KIT
- MULTI-PURPOSE BLADE KIT
- RUBBER PROTECTION KIT
- CLAM SHELL KIT
- WARRANTY EXTENSION GOLD 24

SPECIFICATIONS

EQUIPMENT	 $\geq 13,200 \leq 26,400$ lbs
LOAD CAPACITY (CLAWS CLOSED)	10.2 ft ³
FLOW DIRECTION	4 - 8 gal/min
OIL FLOW (OPEN/CLOSE)	7 gal/min
PRESSURE OF ROTATION	> 2,321 PSI
PRESSURE (OPEN/CLOSE)	2,900 PSI/5,802 PSI
WEIGHT	1,323 lbs
ROTATION	360°



AREAS OF APPLICATION



DEMOLITION



URBAN
CONSTRUCTION
SITES



PORTS AND
FREIGHT
TERMINALS



QUARRIES



RECYCLING AND
WASTE SORTING
FACILITY

The data provided above is not binding, as the manufacturer reserves itself the right to make improvements to its products at any time and with no advance notice. References to excavator weights are approximate and many may be subject to changes.