



REDUCE PRECIOE PRECIOE

MB: WELL ESTABLISHED, VERSATILE AND DETERMINED

MB CRUSHER DEVELOPS AND CREATES EQUIPMENT FOR THE CRUSHING, DEMOLITION, AND RECYCLING INDUSTRIES.

It has been doing this for over 18 years. Thanks to its characteristic determination and versatility, the company invented the first crusher for excavators with jaw action.

The company's dedication to technological research has contributed to the development of products

that can be used with any type of machine.

Transforming any brand construction equipment into authentic mobile crushers, improving their use on site and their general performance.

As a result, MB Crusher has grown so much over the years that now it is recognized worldwide as an industry leader. With its extensive range of products, it is able to provide the technological solutions companies are looking for.



100% MADE IN ITALY

MB Crusher is an Italian-based company but is also present all over the world. All production phases are carried out in the company's corporate office, in Fara Vicentino, Italy.

17.000 square meters of surface house a research and development facility, a production site, sales, and administration offices. Here every unit is designed, assembled and offered on an international platform by more than 130 staff members.

Brazil, China, France, Germany, Japan, India, Russia, United States.

8 Branch offices support the headquarters with promoting our products and assisting our customers in all 5 continents. With a dealer network of more than 230 locations we are able to distribute MB Crusher products to more than 150 countries



GUARANTEED PRODUCTS AND CERTIFIED QUALITY

THE PROMISE OF A RELIABLE PRODUCT, IN COMPLIANCE WITH INTERNATIONAL LAWS, IS AN ESSENTIAL REQUIREMENT FOR OUR CUSTOMERS AND FOR US AT MB.

As proof, every step of every single unit from its production to its completion, is continuously certified to comply with legal standards, and to keep up with a constantly evolving industry and customer base.

CERTIFICATIONS OF THE PRODUCT

UNI EN ISO 9001

Quality management systems

CE

Certificate of conformity

TUV

Certificate of safety requirements

PCT

International patent protection



PROCESS CERTIFICATIONS

UNI EN ISO 14001:2004 (UNDERWAY)

Environmental management system requirements

RINA CERTIFICATION SYSTEM

Organization with processes and qualified welding staff

MB CRUSHER SOLUTIONS FOR EVERY MACHINE

CRUSHERS, SCREENERS, GRAPPLES, SHAFTS SCREENERS. DRUM CUTTERS

MB Crusher provides professionals in the field with a wide range of machines that can make demolition and construction sites of any size independent and competitive, both in terms of operations and of workload.

MB equipment is designed to respond to all needs on the jobsite, even the most challenging. We provide solutions for every type of job site, location, or machine. From excavators weighing more than 70 tons down to 3.5 tons, to loaders, backhoes, mini loaders, to telehandlers, there is a suitable MB

attachment. Installation is quick and easy, whether it is a larger or a smaller unit in the MB range.



BEFORE AND AFTER: MB EQUIPMENT'S IMPACT ON INERT MATERIAL

The MB Crusher machines transform inert material directly on site and allow you to manage the recovery and recycling of the materials independently.

BUILDING Materials

Asphalt - Concrete - Brick
Reinforced concrete - Travertine
Ceramic - Drywall
Demolition material



STONE

River rock - Chalk - Marble

Granite - Lava stone

Cobble stones - Rock

Silicon stone - Travertine - Basalt



ORGANIC MATERIALS

Organic waste - Clay - Charcoal
Wood - Landfill



METALS

Aluminium - Iron - Copper Foundry material



OTHER

Limestone - Plastics - Glass - Salt Vine posts - Lamp posts - Sand



ONE SYSTEM, MANY APPLICATION AREAS







ROAD WORK

URBAN CONSTRUCTION SITES



RECYCLING AND COMPOSTING



EXCAVATIONS



MAINTENANCE OF PARKLAND, FARMLAND AND WOODLAND



UTILITY WORK



QUARRIES



MINES



TUNNELS



WORKING INSIDE FACILITIES



INDUSTRIAL AREAS



FOUNDRIES




FINE SIFTING



MOVING AND SEPARATING MATERIALS



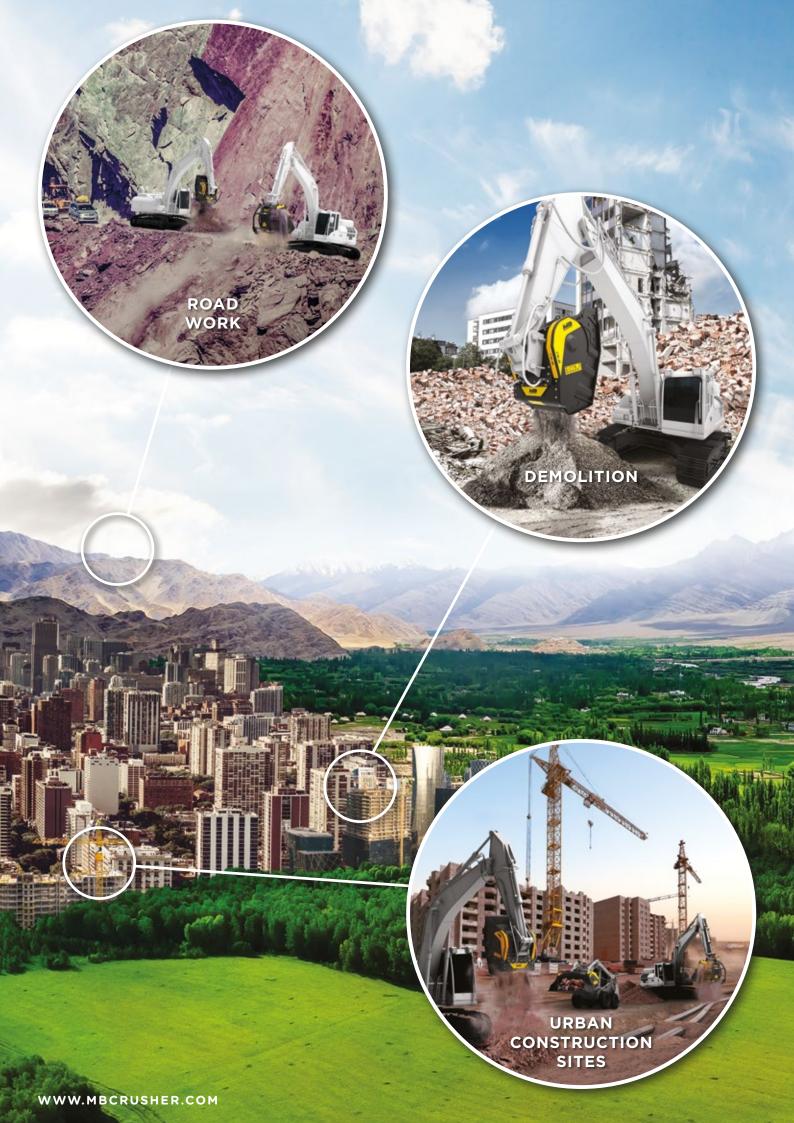



MB CRUSHER FOR EXCAVATORS

THE WORLD'S WIDEST RANGE OF CRUSHER ATTACHMENTS WITH MORE THAN 90% MARKET SHARE

- EFFICIENT HYDRAULICS
- PRODUCTIVE
- STABLE
- HARDOX®





WATCH THE VIDEO

MODELS

* rear



	MODEL	UOM	MB-C50 S4	BF60.1 S4	BF70.2 S4	BF80.3 S4	BF90.3 S4	BF120.4 S4	BF 135.8	BF 150.10
	RECOMMENDED EXCAVATOR	Ton	≥ 5 ≤ 8	≥ 8 ≤ 18	≥ 15 ≤ 25	≥ 18,5 ≤ 29	≥ 21 ≤ 32	≥ 30 ≤ 45	≥ 43 ≤ 80	≥ 70 ≤ 100
Sept.	RECOMMENDED BACKHOE LOADER	Ton	*≥5≤9	-	-	-	-	-	-	-
	WEIGHT	Ton	0,75	1,65	2,30	3	3,50	4,80	7,50	10,50
	LOAD CAPACITY	m³	0,15	0,55	0,65	0,70	0,90	1,30	1,60	2,30
	PRESSURE	bar	> 200	> 220	> 220	> 220	> 220	> 220	> 230	> 230
	OIL FLOW**	I/min.	>90 < 130	> 120 < 180	> 150 < 200	> 150 < 220	> 180 < 240	> 190 < 260	> 320 < 380	> 380 < 430
	MOUTH OPENING WIDTH	mm	540	610	740	850	910	1205	1300	1450
	MOUTH OPENING HEIGHT	mm	250	500	510	510	540	540	600	700
	PRODUCTION RATE	m³/h								
	15 mm	m³/h	4	7	9	10	12	15	-	-
	20 mm	m³/h	4,8	7,7	10	11	13,2	16,4	-	-
_	30 mm	m³/h	6,3	9	12	13	15,5	19,2	-	-
ADJUSTMENT	40 mm	m³/h	7,8	10,4	14	15	17,8	22	38,7	-
Σ	50 mm	m³/h	9,3	11,7	16	17	20	24,8	43,2	-
LSC	60 mm	m³/h	10	13	18	19	22,5	27,6	47,6	-
ž	70 mm	m³/h	-	14,4	20	21	24,8	30,4	52,2	-
	80 mm	m³/h	-	15,8	22	23	27,2	33	56,6	-
ООТРОТ	90 mm	m³/h	-	17,1	24	25	29,5	36	61,1	-
Ē	100 mm	m³/h	-	18,5	26	27	31,8	38,8	65,6	-
5	110 mm	m³/h	-	19,8	28	29	34,2	41,6	70,1	73,1
ក្ន	120 mm	m³/h	-	21	30	31	36,5	44,4	74,5	76,6
Ē	130 mm	m³/h	-	23	31	33	38,8	47,2	79,1	82,5
CRUSHING	135 mm	m³/h	-	-	-	34	41	48,6	81,3	84,1
2	140 mm	m³/h	-	-	-	-	42	50	83,5	87,6
-	145 mm	m³/h	-	-	-	-	-	53	85,7	91,1
	150 mm	m³/h	-	-	-	-	-	-	88	95
	200 mm	m³/h	-	-	-	-	-	-	-	120

**The hydraulic flow and pressure must both meet the required parameters.
Toobtain the values in formes per hour, multiply the figures listed in the table by the specific weight of the materials.
These values are indicative only and are calculated with materials of medium load capacity.



CERTIFIED OUTPUT SIZE OF MATERIAL even with used jaws



Designed to pick up and process material WITH EASE WHILE GUARANTEEING QUALITY AND INCREASED PRODUTION RATES



The AAA+ hydraulic system EXTENDS
THE LIFE OF THE EXCAVATOR



WIDEST CRUSHER MOUTH OPENING, per weight of the equipment, available on the market



QUICK AND EASY MAINTENANCE without the need to replace oil



Equipped with control devices
TO REDUCE VIBRATION
on the equipment arm

AREAS OF APPLICATIONS



DEMOLITION



OAD WORK



UTILITY WOR

SPARE PARTS KIT



CONSTRUCTION SITES



QUARRIES



MINES



WORKING INSIDE FACILITIES



INDUSTRIAL AREAS



ENVIRONMENTAL REMEDIATIONS

ACCESSORIES

WARRANTY EXTENSION GOLD 24



DUST SUPRESSION KIT



FIXED COUPLING



HOUR METER



IRON SEPARATOR







MB CRUSHER FOR LOADERS, MINI LOADERS, BACKHOE LOADERS

- EFFICIENT HYDRAULICS
- PRODUCTIVE
- STABLE
- HARDOX®













MODEL	UOM	MB-L120 S2	MB-L140 S2	MB-L160 S2	MB-L200 S2
7 RECOMMENDED EXCAVATOR	Ton	$\geq 6,6 \leq 12$	≥ 7 ≤ 13	≥ 11 ≤ 16	≥ 12 ≤ 17
RECOMMENDED BACKHOE LOADER/LOADER	Ton	$\geq 4 \leq 9$	≥ 4 ≤ 10	≥ 7 ≤ 11	≥ 7 ≤ 12
RECOMMENDED SKID LOADER	Ton	$\geq 3 \leq 6$	≥ 3 ≤ 6	$\geq 4,5 \leq 7$	$\geq 6 \leq 8$
WEIGHT	Ton	0,95	0,98	1,45	1,50
LOAD CAPACITY	m³	0,19	0,2	0,35	0,43
PRESSURE	bar	> 200	> 200	> 200	> 200
COUNTER PRESSURE	bar	< 10	< 10	< 10	< 10
OIL FLOW*	I/min.	95	98	110	120
MOUTH OPENING WIDTH	mm	730	740	1100	1150
MOUTH OPENING HEIGHT	mm	250	250	250	260
PRODUCTION RATE					
15 mm	m³/h	6	8	9	10
<u></u> 20 mm	m³/h	7	9	10,2	11,3
20 mm 20 mm 40 mm	m³/h	9	11	12,7	14
40 mm	m³/h	11	13	15,1	16,7
G 50 mm	m³/h	13	15	17,6	19,3
60 mm	m³/h	14	16	20	22



CERTIFIED OUTPUT SIZE OF MATERIAL even with used jaws



Designed to pick up and process material WITH EASE WHILE GUARANTEEING QUALITY AND INCREASED PRODUTION RATES



The AAA+ hydraulic system EXTENDS
THE LIFE OF THE EXCAVATOR



WIDEST CRUSHER MOUTH OPENING, per weight of the equipment, available on the market



QUICK AND EASY MAINTENANCE without the need to replace oil



Equipped with control devices
TO REDUCE VIBRATION
on the equipment arm

AREAS OF APPLICATIONS



DEMOLITION



ROAD WORK



RECYCL INC



URBAN CONSTRUCTION SITES



WORKING INSIDE FACILITIES



INDUSTRIAL AREAS



ENVIRONMENTAL REMEDIATIONS

ACCESSORIES

WARRANTY EXTENSION GOLD 24



SPARE PARTS KIT



FIXED COUPLING



HOUR METER



DUST SUPRESSION KIT





MB SCREENING BUCKETS

- SIMPLIFIED
- RELIABLE AND HIGH-PERFORMING
- EASY TO TRANSPORT
- HIGH OUTPUT
- MAXIMUM VERSATILITY
- HARDOX®





MODELS

* rear













	MODEL	UOM	MB-LS170 S2	MB-LS220 S2	MB-S10 S4	MB-S14 S4	MB-S18 S4	MB-S23
A. A.	RECOMMENDED EXCAVATOR	Ton	-	-	≥ 4 < 9	≥ 9 < 20	≥ 20 < 35	≥ 35 ≤ 50
	RECOMMENDED LOADER	Ton	≥ 8 < 15	≥ 15 < 25	-	-	-	-
	RECOMMENDED BACKHOE	Ton	≥ 6,5 < 11	≥ 12 < 25	*≥ 4 < 9	-	-	-
	WEIGHT	Ton	1,45	2,80	0,41	1,10	2	3,66
	LOAD CAPACITY	m³	1,10	2,40	0,32	1,10	2,40	3,75
	PRESSURE COUNTER PRESSURE**	bar	> 160 < 40	> 200 < 40	> 130 < 40	>150 < 40	> 200 < 40	> 320 < 5
	OIL FLOW	I/min.	80	120	40	60	120	160



Designed with a cone-shaped basket with the size and depth to **OPTIMIZE PRODUCTION RATES**



OUR SCREENER BUCKETS HAVE THE WIDEST SCREENING SURFACE available on the market, per weight of the equipment



DESIGNED TO PICK UP AND PROCESS MATERIAL WITH EASE



Equipped with A LOADING STRAIN **CONTROL SYSTEM**



Equipped with **BRACKETS**



QUICK AND EASY interchangeable modular panels available in different sizes

AREAS OF APPLICATIONS







UTILITY WORK



URBAN CONSTRUCTION



QUARRIES





ENVIRONMENTAL **REMEDIATIONS**



INDUSTRIAL **AREAS**



ACCESSORIES

WARRANTY EXTENSION GOLD 24



BASKET PROTECTION KIT

SPARE PARTS KIT









FIXED COUPLING






HOUR METER



FIXED COUPLING



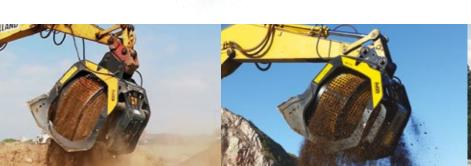



MB SHAFTS SCREENER

- EFFICIENT HYDRAULICS
- SILENT
- COMPACT AND STABLE
- INNOVATIVE
- HARDOX®





THE VIDEO

SHAFT KITS

* shaft in closed position

	KIT	SETTINGS	APPLICATION
Ö	RC COMPOST KIT	36,5* mm	Crushing brushwood and wood trusses Composting
	RM MIXER KIT	-	Soil Aeration Compost aeration Breaking down charcoal Crushing glass Crushing drywall
0	RE8/RE16 FINE SIFTING KIT	8,5/16 mm	Sifting damp/dry soil
\Q	RQ20/RQ50 MEDIUM SIFTING KIT	20/50 mm	Sifting damp/dry soil Soil aeration









		MODEL	UOM	MB-HDS214	MB-HDS314	MB-HDS320	MB-HDS323
		RECOMMENDED EXCAVATOR	Ton	≥ 6 ≤ 12	≥ 10 ≤ 20	≥ 16 ≤ 24	≥ 20 ≤ 35
YE.		RECOMMENDED BACKHOE LOADER/LOADER	Ton	$\geq 5 \leq 8$	≥ 6 ≤ 10	≥ 9 ≤ 12	≥ 10 ≤ 15
	€~	RECOMMENDED SKID LOADER	Ton	> 3,5	-	-	-
		WEIGHT	Ton	0,82	1,4	2,1	2,4
		LOAD CAPACITY	m³	0,5	0,9	1,35	1,65
		PRESSURE	bar	> 200	> 230	> 250	> 250
		OIL FLOW**	I/min.	75	100	120	120



OPTIMAL DESIGN AND LARGE LOADING CAPACITY ensure optimum levels of output



QUICK, EASY AND CENTRALIZED MAINTENANCE



SYSTEM for interchangeable shaft kits, carried out by the machine operator directly on site and in complete safety



MODERATE NOISE EMISSION



AUTOMATIC HYDRAULIC SYSTEM for engine and transmission protection



Includes **SHAFT HOLDER**

AREAS OF APPLICATIONS















RECYCLING

COMPOSTING

INDUSTRIAL

REMEDIATIONS

ACCESSORIES

SPARE PARTS KIT



FIXED COUPLING





SHAFT HOLDER

RC COMPOST KIT



RM MIXER KIT



RE8/RE16



RQ20/RQ50 MEDIUM SIFTING KIT











MB DRUM CUTTERS

- COMPACT AND STABLE
- THE ONLY ONE WITH DIRECT DRIVE TWIN MOTOR SYSTEM
- PRECISE AND VERSATILE
- SAFE AND EFFICIENT
- HIGH-PERFORMING HYDRAULICS





REPLACEABLE DRUMS

EASILY ON THE JOB IN LESS THAN 1 HOUR









MODEL	UOM	MB-R500	MB-R700	MB-R800	MB-R900
₹ RECOMMENDED EXCAVATOR	Ton	≥ 3,5 ≤ 11	≥ 6 ≤ 13	≥ 10 ≤ 22	≥ 19 ≤ 35
RECOMMENDED SKID LOADER	Ton	$\geq 3.5 \leq 6$	≥ 6 ≤ 10	-	-
CUT WIDTH	mm	450	890	1015	1130
PICK FORCE	N	19600	19600	33900	40000
SPEED/MIN. (MIN/MAX)	rpm	80/120	80/110	60/80	60/80
OUTPUT TORQUE	Nm	5000	5000	10000	13200
PRESSURE COUNTER PRESSURE	bar	> 350 < 4	> 350 < 4	> 350 < 4	> 350 < 4
WEIGHT	Ton	0,3	0,6	1	1,4
OIL FLOW*	OIL FLOW* I/min.		110-180	200-300	250-350
DIAMETER DRUM	mm	500	500	600	680



Drum and pick kits **AVAILABLE** FOR ALL KINDS OF MATERIALS



Equipped with **NO TORSION SYSTEM** which reduces transversal stress on the arm of the excavator



Equipped with WEAR-RESISTANT **PLATES** for the protection of the central body



Excavator **HIGH OIL TEMPERATURE REDUCING DEVICE** available



Equipped with **POWER BOOST**. Multiplying the power on the rotary cutter when it requires more power



Suitable for **UNDERWATER WORK**

AREAS OF APPLICATIONS



















ROCK, ASPHALT AND CEMENT

DEMOLITION

CONSTRUCTION MAINTENANCE AND SITES SURFACE PROFILING

TUNNEL AND ROCK

ACCESSORIES

WARRANTY EXTENSION GOLD 24







DRUM KIT



ROCK AND ASPHALT PICK KITS



DUST SUPRESSION KIT



MB-R500 ACCESSORIES



DRUM COVER KIT



CUTTING DEPTH ADJUSTMENT KIT



*CUTTER BODY **ROTATION KIT**



*SECONDARY ROTATIONAL CIRCUIT REQUIRED

POWER TRANSMISSION KIT





MB SORTING GRAPPLES


STRONG AND AGILE

INNOVATIVE

SIMPLIFIED

HARDOX®



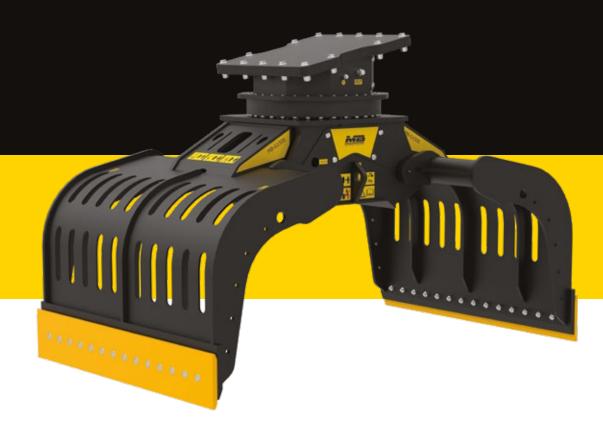











	MODEL	UOM	MB-G600 S4	MB-G900 S4	MB-G1200 S4	MB-G1500 S4
	RECOMMENDED EXCAVATOR	Ton	≥ 6 ≤ 12	≥ 12 ≤ 18	$\geq 18 \leq 30$	≥ 20 ≤ 30
	WEIGHT	Ton	0,60	0,78	1,65	2,05
	LOAD CAPACITY (CLAWS CLOSED)	m³	0,29	0,43	0,71	1,43
	ROTATION	Degrees	360°	360°	360°	360°
	FLOW DIRECTION	I/min.	15 - 30	15 - 30	20 - 35	20 - 35
	PRESSURE OF ROTATION	bar	> 160	> 160	> 220	> 220
	PRESSURE (OPEN/CLOSE)	bar	200 - 300	200 - 300	300 - 400	300 - 400
	OIL FLOW (OPEN/CLOSE)	I/min.	25	30	70	70













AREAS OF APPLICATIONS



PORTS AND CONSTRUCTION SITES FREIGHT YARDS





RECYCLING CENTER



MOVING AND SEPARATING MATERIALS





*ROTATION POWER

ACCESSORIES

WARRANTY EXTENSION GOLD 24



CLAM SHELL KIT



GRIP IMPROVEMENT KIT

SPARE PARTS KIT





FIXED COUPLING







*ROTATION FLOW RATE 40 - 70 I/min

MULTI-PURPOSE




OVER 60 YEARS OF SPECIALIZATION

PROVEN,
GUARANTEED QUALITY

PRODUCTS AND PATENTS

OPERATING ALL OVER THE WORLD

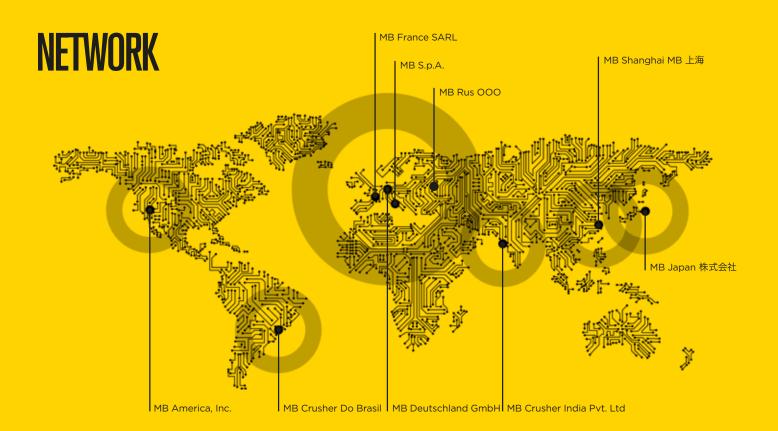

MB HEADQUARTERS

Via Astico 30/A, 36030 Fara Vicentino (VI) Italy Tel +39 0445 308148 - Fax +39 0445 308179 info@mbcrusher.com

MB INDIA

MB CRUSHER INDIA PVT. LTD

Office No. C, 1st Floor, D Building, MBC Park, Near Hypercity Mall, Kasarwadavali, Thane - West, Thane - 400615, Maharashtra Tel: +91 22 4970 6759 info@mbcrusher.in



























