
MB-C50 S2

U.S.A.





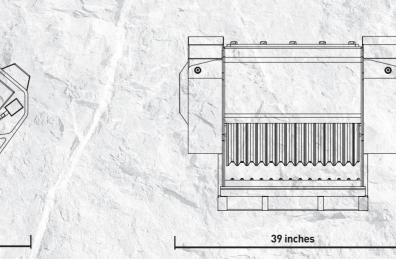

30 inches

www.mbamerica.com - info@mbamerica.com

48 inches

"MB'S little work of magic"



The MB-C50 is the smallest crusher bucket in the MB product line, weighting 1,654 lbs an designed to work on excavators starting from 8,800 lbs. It is suitable for mini excavators and great for small crushing jobs.

Due to its reduced size and weight, the MB-C50 has proven to be particularly useful in landscaping and restricted areas, ensuring high performance in small size with a production rate from 5 cy/h to 13 cy/h, depending on the output adjustment.



AREAS OF APPLICATION

DEMOLITION ROAD WORKS RECYCLING EXCAVATION

SPECIFICATIONS

RECOMMENDED Excavator	LOAD CAPACITY	OPENING DIMENSIONS	OUTPUT SETTING	DIMENSIONS
≥8,800lbs	0.19 cy	22" W x 10" H in	≥ 0.5 in ≤ 2.5 in	48" x 39" x 30" H in
OIL FLOW	PRESSURE	COUNTER PRESSURE	WEIGHT	MAXIMUM PRODUCTION
OIE I EOW	PRESSORE	COONTERTRESSORE	WEIGHT	MAXIMOM PRODUCTION
24 gal/min.	2,900 PSI	< 145 PSI	1,654 lbs	13 cy/h

ACCESSORIES

RECOMMENDED SPARE PARTS KIT	FIXED COUPLER	QUICK FEMALE COUPLER	IRON SEPARATOR	HOUR METER
BF5000010	FC5000000	BF5000000	-	804MBNF01
			DUST SUPPRESSION KIT	OPTIONAL 24 MONTHS WARRANTY
			KNMBOOL-KNMBOOS- KNMBOOM	WA245000

The data provided above is not binding, as the manufacturer reserves itself the right to make improvements to its products at any time and with no advance notice References to excavator weights are approximate and many may be subject to changes. Consider a 20% tolerance.